




### Vehicle Filling Stations

100 - 3,000 scfm Up to 5,000 psig



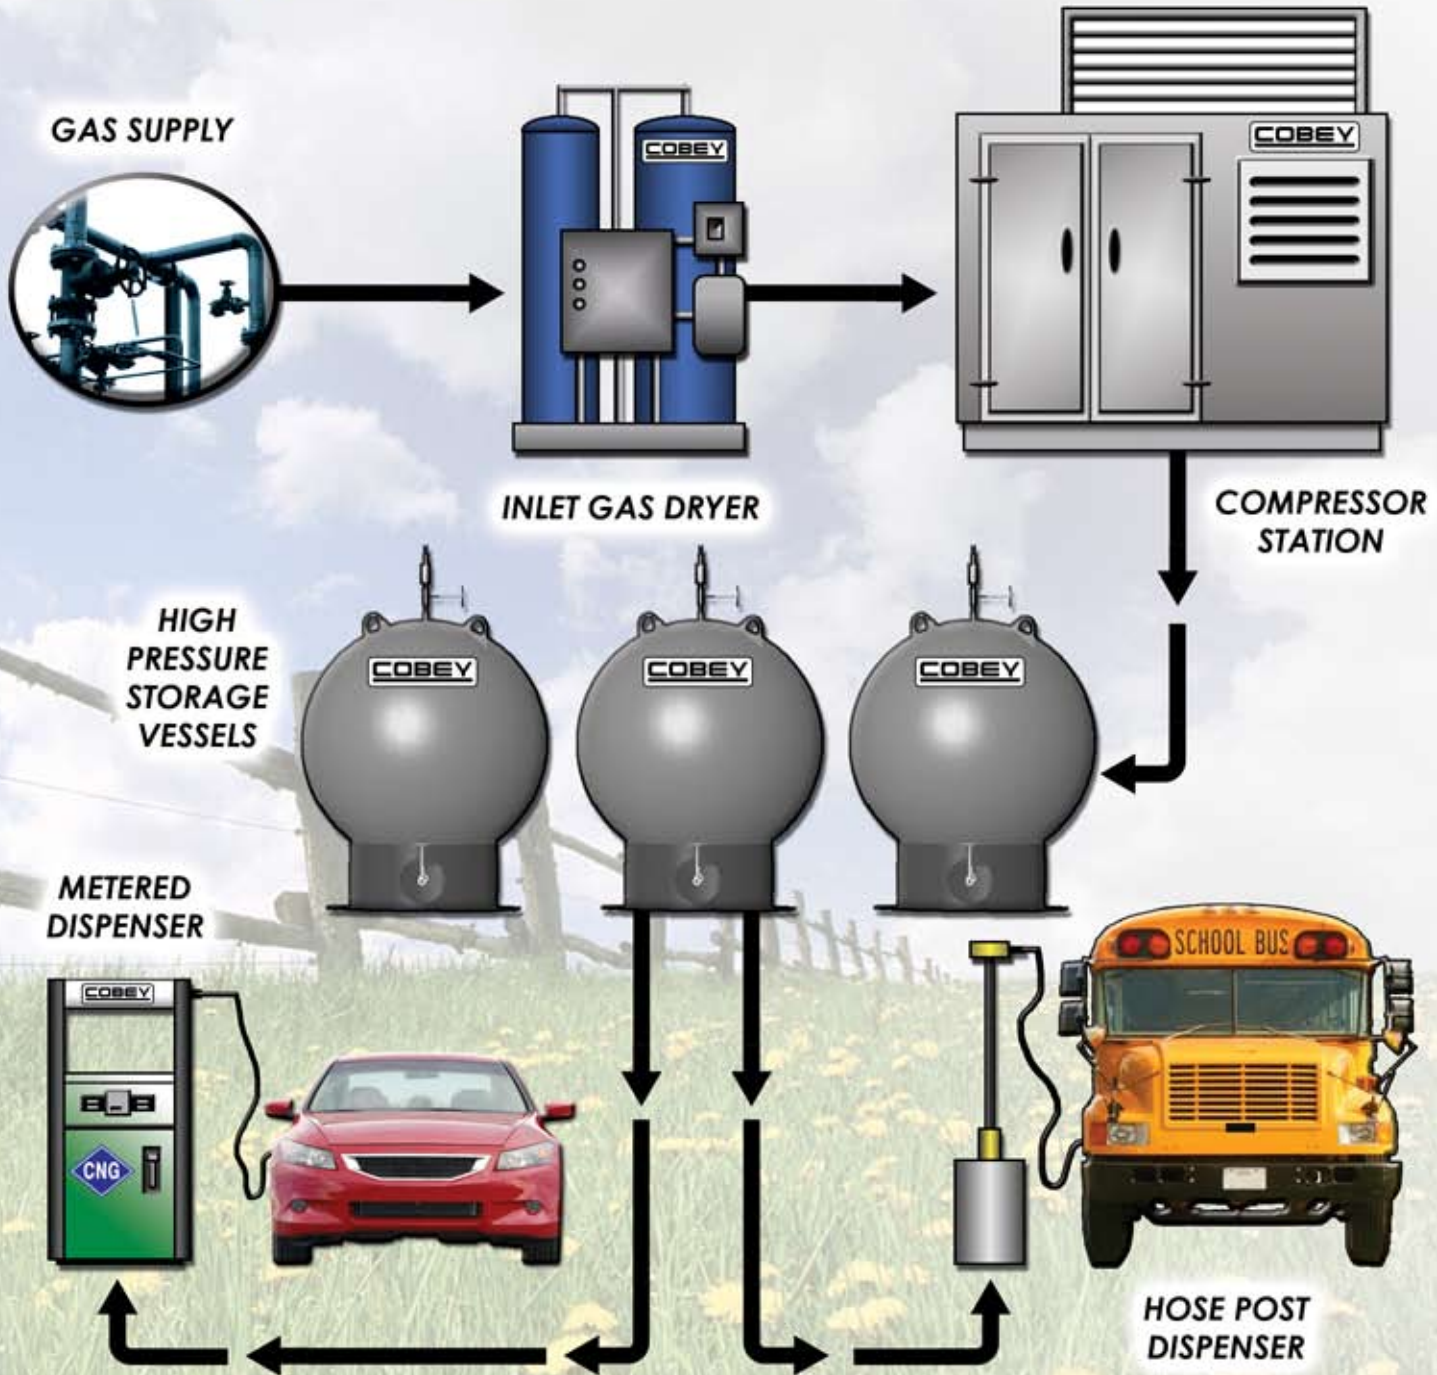

# Vehicle Filling Stations Customizable Options


## GAS DRYERS

### Models:

- Single tower
- Regenerable single tower
- Regenerable twin tower
- Fully automatic heat reactivated twin tower

### Specs & Standards:

- ASME Section VIII, Division 1 certified
- Dryer sizing varies depending on available natural gas pressure and compressor flows.

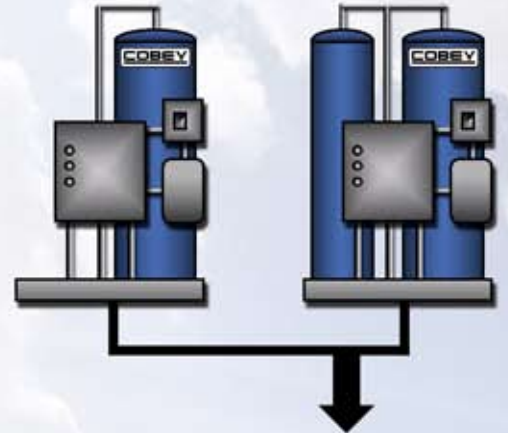

## COMPRESSOR STATIONS

Model #	Driver	Flow Range	Stages of Compression	Suction Pressure Range	HP Range
CE-C100	Elec*	91 - 234 scfm	4	11.5 - 48	48 - 94
CE-C250	Elec*	108 - 468 scfm	4	3 - 54	62 - 181
CE-C500	Elec*	259 - 958 scfm	4	1 - 39	150 - 400

### Specs & Standards:

- Accommodates variable flow rates
- Pressures up to 5,000 PSIG
- Remote monitoring capable
- Electric components designed for 480/60Hz/3Ph service
- Designed to NFPA 52, ASME & local codes
- Electrical - Class 1, Div 2, Group D (\*Natural gas engines available)




## HIGH PRESSURE STORAGE VESSELS

Model #	Type	Length	Vol @5,000 psig(scF)	Design Pressure
CE-VLA	Tube - 3 bank cascade	23'	36,621	5,500
CE-VRA	Sphere - 3 bank cascade	55"	35,979	5,500

### Specs & Standards:

- ASME section VIII, Div 1
- Storage Vessels available in other quantities
- Low volume tubes also available

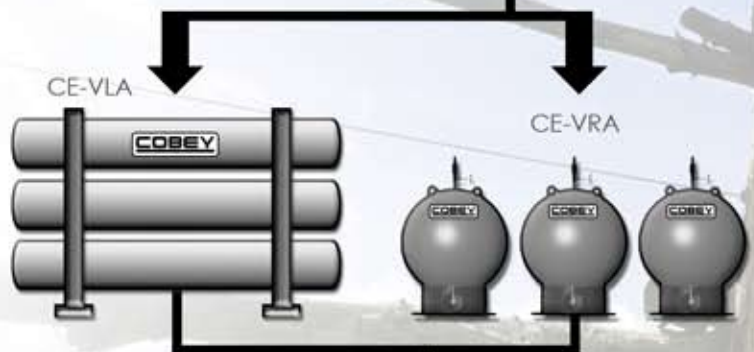


## DISPENSERS

### Models:

- Metered - Fast Fill
- Post - Fast Fill
- Post - Time Fill

### Specs:

- Rated for 3,600 psi vehicle fill pressure, 3,000 psi models also available
- High flow models available

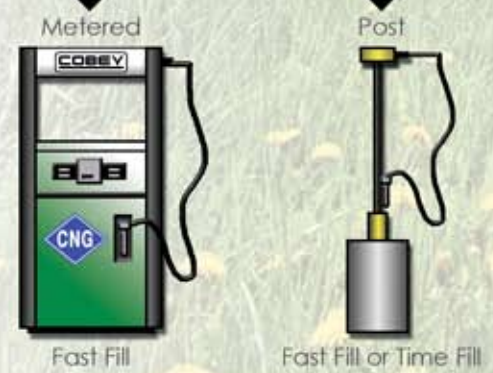

Contact us to start your quote today  
 cobey@cobey.com +1.716.362.9550  
 www.cobey.com

